


TEST REPORT IEC 60086-1 & IEC 60086-2 Primary Battery - Part 1: General Primary Battery - Part 2: Physical and electrical specifications	
Report Number.....:	SHES260400587101
Date of issue	2026-05-11
Total number of pages.....	22 Pages
Name of Testing Laboratory preparing the Report.....:	SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd
Applicant's name	SUZHOU XINLVZHOU ELECTRONICS CO., LTD.
Address	SHANJI ROAD 158, XIANGCHENG DISTRICT, SUZHOU CITY, JIANGSU, CHINA.
Test specification:	
Standard.....:	IEC 60086-1:2021 in conjunction with IEC 60086-2:2021
Test procedure.....:	SGS-CSTC
Non-standard test method.....:	N/A

Test item description..... :	LR6 AM-3 SIZE AA 1.5 V ALKALINE BATTERY
Trade Mark..... :	WARRIORS
Manufacturer..... :	Same as applicant
Model/Type reference..... :	LR6
Ratings..... :	1,5 V
Designation..... :	a) Category 1 batteries LR20 ☐ R20P ☐ R20S ☐ LR14 ☐ R14P ☐ R14S ☐ LR6 ☒ FR14505 ☐ R6P ☐ R6S ☐ LR03 ☐ FR10G445 ☐ R03 ☐ LR1 ☐ R1 ☐ LR8D425 ☐ b) Category 2 batteries CR14250 ☐ CR15H270 ☐ CR17345 ☐ CR17450 ☐ BR17335 ☐ c) Category 3 batteries LR9 ☐ CR11108 ☐ d) Category 4 batteries PR70 ☐ PR41 ☐ PR48 ☐ PR44 ☐ LR41 ☐ LR55 ☐ LR54 ☐ LR43 ☐ LR44 ☐ SR62 ☐ SR63 ☐ SR65 ☐ SR64 ☐ SR60 ☐ SR67 ☐ SR66 ☐ SR58 ☐ SR68 ☐ SR59 ☐ SR69 ☐ SR41 ☐ SR57 ☐ SR55 ☐ SR48 ☐ SR54 ☐ SR42 ☐ SR43 ☐ SR44 ☐ CR1025 ☐ CR1216 ☐ CR1220 ☐ CR1616 ☐ CR2012 ☐ CR1620 ☐ CR2016 ☐ CR2025 ☐ CR2320 ☐ CR2032 ☐ CR2330 ☐ CR2430 ☐ CR2354 ☐ CR3032 ☐ CR2450 ☐ BR1225 ☐ BR2016 ☐ BR2320 ☐ BR2325 ☐ BR3032 ☐ e) Category 5: Other round batteries – Miscellaneous 4LR44 ☐ 2CR13252 ☐ 4SR44 ☐ 5AR40 ☐ f) Category 6: Non-round batteries – Miscellaneous 3R12P ☐ 3R12S ☐ 3LR12 ☐ 4LR61 ☐ CR-P2 ☐ 2CR5 ☐ 4R25X ☐ 4LR25X ☐ 4R25Y ☐ 4R25-2 ☐ 4LR25-2 ☐ 6F22 ☐ 6LR61 ☐ 6LP3146 ☐ 6AS4 ☐ 6AS6 ☐

Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
☒	Testing Laboratory:	SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.
Testing location/ address.....:		588 West Jindu Road, Xinqiao Songjiang, 201612 Shanghai, China
Tested by (name, function, signature)		Junhao Lu, JJ Yang / Project Engineer <i>Junhao Lu JJ Yang</i>
Approved by (name, function, signature) ..		Eric Wang / Project Reviewer <i>Eric Wang</i>
☐	Testing procedure: CTF Stage 1:	N/A
Testing location/ address.....:		
Tested by (name, function, signature).....:		
Approved by (name, function, signature)....:		
☐	Testing procedure: CTF Stage 2:	N/A
Testing location/ address.....:		
Tested by (name + signature)		
Witnessed by (name, function, signature)....:		
Approved by (name, function, signature)....:		
☐	Testing procedure: CTF Stage 3:	N/A
☐	Testing procedure: CTF Stage 4:	N/A
Testing location/ address.....:		
Tested by (name, function, signature).....:		
Witnessed by (name, function, signature)....:		
Approved by (name, function, signature)....:		
Supervised by (name, function, signature) :		

List of Attachments (including a total number of pages in each attachment): Attachment 1: 1 page of Photos	
Summary of testing:	
Tests performed (name of test and test clause): Specific requirements and tests (lithium systems) ☒ 4 Requirements ☒ 5 Performance – Testing ☒ 6 Performance – Test conditions ☐ 7 Sampling and quality assurance ☒ 8 Battery packaging ☒ 8.1.4 Category 1 – Specifications: LR6, FR14505, R6P, R6S	Testing location: SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. 588 West Jindu Road, Xinqiao Songjiang, 201612 Shanghai, China
Summary of compliance with National Differences (List of countries addressed): none ☒ The product fulfils the requirements of EN IEC 60086-1:2021 & EN IEC 60086-2:2021	

Copy of marking plate:

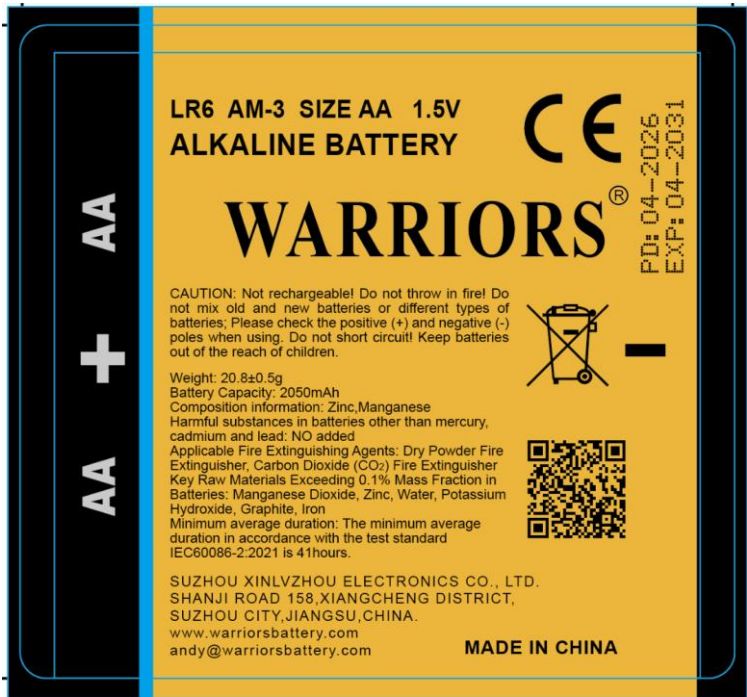

The marking plate is for a Warriors AA AM-3 SIZE AA 1.5V ALKALINE BATTERY. It features the CE mark, a QR code, and detailed technical specifications. The battery is marked with 'AA + AA' and a '+' sign on the left side. The bottom of the plate indicates 'MADE IN CHINA'.

LR6 AM-3 SIZE AA 1.5V
ALKALINE BATTERY

WARRIORS®

CAUTION: Not rechargeable! Do not throw in fire! Do not mix old and new batteries or different types of batteries; Please check the positive (+) and negative (-) poles when using. Do not short circuit! Keep batteries out of the reach of children.

Weight: 20.8±0.5g
 Battery Capacity: 2050mAh
 Composition information: Zinc, Manganese
 Harmful substances in batteries other than mercury, cadmium and lead: NO added
 Applicable Fire Extinguishing Agents: Dry Powder Fire Extinguisher, Carbon Dioxide (CO₂) Fire Extinguisher
 Key Raw Materials Exceeding 0.1% Mass Fraction in Batteries: Manganese Dioxide, Zinc, Water, Potassium Hydroxide, Graphite, Iron
 Minimum average duration: The minimum average duration in accordance with the test standard IEC60086-2:2021 is 41hours.

SUZHOU XINLVZHOU ELECTRONICS CO., LTD.
 SHANJI ROAD 158, XIANGCHENG DISTRICT,
 SUZHOU CITY, JIANGSU, CHINA.
 www.warriorsbattery.com
 andy@warriorsbattery.com

MADE IN CHINA

Test item particulars	
Classification of installation and use..... --	
Supply Connection --	
Possible test case verdicts: - test case does not apply to the test object..... : N/A - test object does meet the requirement..... : P (Pass) - test object does not meet the requirement..... : F (Fail)	
Testing	
Date of receipt of test item..... : 2026-04-08	
Date (s) of performance of tests : 2026-04-09 to 2026-05-06	
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a ☒ comma / ☐ point is used as the decimal separator. This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx . Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.	
Manufacturer's Declaration:	
The application for obtaining a Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....	☐ Yes ☒ Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies)..... : Same as applicant	
General product information:	
Product description:	LR6 AM-3 SIZE AA 1.5 V ALKALINE BATTERY
Model:	LR6
Rated voltage:	1,5V

IEC 60086-1			
Clause	Requirement + Test	Result - Remark	Verdict

4	REQUIREMENTS		P
4.1	General		P
4.1.1	Design		P
	Additionally, information on equipment design can be found in Annex B		N/A
4.1.2	Battery dimensions		P
	The dimensions for individual types of batteries are given in IEC 60086-2 and IEC 60086-3	LR6	P
4.1.3	Terminals		P
4.1.3.1	General		P
	Terminals are in accordance with Clause 6 of IEC 60086-2		P
	Their physical shape is designed in such a way that they ensure that the batteries make and maintain good electrical contact at all times		P
	They are made of materials that provide adequate electrical conductivity and corrosion protection		P
4.1.3.2	Contact pressure resistance		P
	Where stated in the battery specification tables or the individual specification sheets in IEC 60086-2, the following applies		P
	A force of 10 N applied through a steel ball of 1 mm diameter at the centre of each contact area for a period of 10 s does not cause any apparent deformation which might prevent satisfactory operation of the battery		P
4.1.3.3	Cap and base		P
	This type of terminal is used for batteries which have their dimensions specified according to Figures 1 to 7 of IEC 60086-2 and which have the cylindrical side of the battery insulated from the terminals		P
4.1.3.4	Cap and case		N/A
	This type of terminal is used for batteries which have their dimensions specified according to Figures 8, 9, 10, 14, 15 and 16 of IEC 60086-2, but in which the cylindrical side of the battery forms part of the positive terminal		N/A
4.1.3.5	Screw terminals		N/A
	This contact consists of a threaded rod in combination with either a metal or insulated metal nut		N/A
4.1.3.6	Flat contacts		N/A

IEC 60086-1			
Clause	Requirement + Test	Result - Remark	Verdict

	These are essentially flat metal surfaces adapted to make electrical contact by suitable contact mechanisms bearing against them		N/A
4.1.3.7	Flat or spiral springs		N/A
	These contacts comprise flat metal strips or spirally wound wires which are in a form that provides pressure contact		N/A
4.1.3.8	Plug-in-sockets		N/A
	These are made up of a suitable assembly of metal contacts, mounted in an insulated housing or holding device and adapted to receive corresponding pins of a mating plug		N/A
4.1.3.9	Snap fasteners		N/A
4.1.3.9.1	General		N/A
	These contacts are composed of a combination comprising a stud (non-resilient) for the positive terminal and a socket (resilient) for the negative terminal		N/A
	They are suitable metal so as to provide efficient electrical connection when joined to the corresponding parts of an external circuit		N/A
4.1.3.9.2	Snap fastener		N/A
	This type of terminal consists of a stud for the positive terminal and a socket for the negative terminal. These are made from nickel plated steel or other suitable material		N/A
	They are designed to provide a secure physical and electrical connection, when fitted with similar corresponding parts for connection to an electrical circuit		N/A
4.1.3.10	Wire		N/A
	Wire leads are single or multi-strand flexible insulated tinned copper		N/A
	The positive terminal wire covering is red and the negative black		N/A
4.1.3.11	Other spring contacts or clips		N/A
	These contacts are generally used on batteries when the corresponding parts of the external circuit are not precisely known		N/A
	They are made of spring brass or of other material having similar properties		N/A
4.1.4	Classification (electrochemical system)		P

IEC 60086-1			
Clause	Requirement + Test	Result - Remark	Verdict

	Primary batteries are classified according to their electrochemical system		P
	Each system, with the exception of the zinc-ammonium chloride, zinc chloride-manganese dioxide system, has been allocated a letter denoting the particular system	Alkaline battery	P
	The electrochemical systems that have been standardized up to now are given in Table 1		P
4.1.5	Designation		P
	The designation of primary batteries is based on their physical parameters, their electrochemical system as well as modifiers, if needed		P
	A comprehensive explanation of the designation system (nomenclature) can be found in Annex C	LR6	P
4.1.6	Marking		P
4.1.6.1	General		P
	With the exception of small batteries too small to mark with all items (see 4.1.6.2), each battery is marked with the following information		P
	a) designation, IEC or common..... :	LR6	P
	b) expiration of a recommended usage period or year and month or week of manufacture..... :		P
	The year and month or week of manufacture may be in code..... :		N/A
	c) polarity of the positive (+) terminal..... :		P
	d) nominal voltage..... :	1,5 V	P
	e) name or trade mark of the manufacturer or supplier..... :		P
	f) cautionary advice..... :		P
4.1.6.2	Marking of smaller batteries		N/A
	a) Some batteries, mainly category 3 and category 4 batteries have a surface too small to accommodate all markings shown in 4.1.6.1		N/A
	For these batteries the designation 4.1.6.1a) and the polarity 4.1.6.1c) are marked on the battery..... :		N/A
	All other markings shown in 4.1.6.1 are given on the immediate packing instead of on the battery..... :		N/A
	b) For P-system batteries		N/A
	4.1.6.1a) are on the battery, the sealing tab or the package..... :		N/A
	4.1.6.1c) are marked on the sealing tab and/or on the battery..... :		N/A

IEC 60086-1			
Clause	Requirement + Test	Result - Remark	Verdict

	4.1.6.1b), 4.1.6.1d) and 4.1.6.1e) are given on the immediate packing instead of on the battery		N/A
	The nominal voltage is marked either 1,4 V or 1,45 V		N/A
	c) Caution for ingestion of swallowable batteries are given.....	On the immediate packing.	N/A
4.1.6.3	Marking of batteries regarding method of disposal		P
	Marking of batteries with respect to the method of disposal is in accordance with local legal requirements		P
4.1.7	Interchangeability: battery voltage		N/A
	Voltage range 1, $U_r = 1,4$ V: Batteries having a standard discharge voltage $m \times U_s$ equal to or within the range of $n \times 1,19$ V to $n \times 1,61$ V		N/A
	Voltage range 2, $U_r = 3,2$ V: Batteries having a standard discharge voltage $m \times U_s$ equal to or within the range of $n \times 2,72$ V to $n \times 3,68$ V		N/A
4.2	Performance		P
4.2.1	Discharge performance	See Table 2	P
	Discharge performance of primary batteries is specified in IEC 60086-2	Only performed initial discharge performance	P
4.2.2	Dimensional stability		P
	The dimensions of batteries are conform with the relevant specified dimensions as given in IEC 60086-2 and IEC 60086-3 at all times during discharge testing under the standard conditions	No deformation.	P
4.2.3	Leakage		P
	When batteries are stored and discharged under the standard conditions given in this specification, no leakage occur	No leakage	P
4.2.4	Open-circuit voltage limits	See Table 1	P
	The maximum open-circuit voltage of batteries does not exceed the values given in Table 1.....		P
4.2.5	Service output		P
	Discharge durations, initial and delayed, of batteries are meet the requirements given in IEC 60086-2	Only performed initial discharge performance	P
4.2.6	Safety		P
	When designing primary batteries, safety under conditions of intended use and foreseeable mis-use as prescribed in IEC 60086-4 and IEC 60086-5 are considered		P
4.2.7	Validity of testing		P

IEC 60086-1			
Clause	Requirement + Test	Result - Remark	Verdict

	Portable primary batteries are subjected to the tests, as required in the 60086 series. Test results remain valid until a design change or requirement revision has been made		P
5	PERFORMANCE – TESTING		P
5.1	Capacity testing versus application and service output testing		N/A
	For the preparation of standard methods of measuring performance (SMMP) of consumer goods, refer to Annex E		N/A
	A capacity of a primary battery is established by electrical discharge tests as detailed in D.2.3		N/A
	However, under consumer usage conditions, the capacities realised from electrical discharge test methods can vary		N/A
	The following factors/variables dramatically impact on optimum capacity realisation		N/A
	a) The current demand from the external electrical circuit/device		N/A
	b) The frequency of current demand		N/A
	c) The minimum voltage at which the device will satisfactorily operate		N/A
	d) The temperature of operation		N/A
5.2	Discharge testing		N/A
5.2.1	General		N/A
	The discharge tests in this standard fall into two categories		N/A
	– application tests		N/A
	– service output tests		N/A
5.2.2	Application tests		N/A
5.2.2.1	General		N/A
	Application tests are accelerated by discharge load, daily period duty cycle, or both. The specified values for load and time intermittency are take the following factors into consideration		N/A
	– discharge efficiency of the battery relative to the application		N/A
	– typical duty cycle use patterns for the application		N/A
	– total time to conduct the test typically not to exceed 30 days		N/A
5.2.2.2	Application tests with multiple loads		N/A

IEC 60086-1			
Clause	Requirement + Test	Result - Remark	Verdict

	For application test with multiple loads, the load order during a cycle starts with the heaviest load and move to the lightest load unless otherwise specified		N/A
5.2.3	Service output tests		N/A
	For service output tests, the value of the load resistor are selected such that the service output approximates 30 days		N/A
5.3	Conformance check to a specified minimum average duration	See Table 2	P
	In order to check the conformance of a battery to any discharge tests specified in IEC 60086-2 and 60086-3, the test is carried out		P
5.4	Guidance for considering proposed value of minimum average duration		P
5.5	OCV testing	See Table 1	P
	Open-circuit voltage is measured with the voltage measuring equipment specified in 6.8.1		P
5.6	Insulation resistance		N/A
	For batteries with insulating labels, cases or jackets, the resistance between externally exposed surfaces of the battery and either terminal is equal to or greater than 5 MΩ		N/A
5.7	Battery dimensions		P
	Dimensions are measured with the measuring equipment specified in 6.8.2		P
5.8	Leakage and deformation	See Table 3	P
	After the service output has been determined under the specified environmental conditions, the discharge is continued in the same way until the closed circuit voltage drops for the first time below 40 % of the nominal voltage of the battery		P
	The requirements of 4.1.3, 4.2.2 and 4.2.3 are met		P
6	PERFORMANCE – TEST CONDITIONS		P
6.1	Storage and discharge conditions		P
	Storage before discharge testing and the actual discharge test are carried out under well-defined conditions. Unless otherwise specified, the conditions given in Table 3 are apply	20°C 55%	P
6.2	Commencement of discharge tests after storage		N/A
	The period between the completion of storage and the start of a delayed discharge test is not exceed 14 days		N/A

IEC 60086-1			
Clause	Requirement + Test	Result - Remark	Verdict

	During this period the batteries are kept at $(20 \pm 2) ^\circ\text{C}$ and $(55 \pm 20 / -40) \% \text{ RH}$ (except for P-system batteries where the relative humidity is $(55 \pm 10) \% \text{ RH}$)		N/A
	At least one day in these conditions is allowed for normalization before starting a discharge test after storage at high temperature		N/A
6.3	Discharge test conditions		P
6.3.1	General		P
	In order to test a battery it is discharged as specified in IEC 60086-2 or IEC 60086-3 until the voltage on load drops for the first time below the specified end-point		P
6.3.2	Compliance		P
	When IEC 60086-2 or IEC 60086-3 specify service outputs for more than one discharge test, batteries are meet all of these requirements in order to comply with this specification		P
6.4	Load resistance		N/A
	When formulating new tests, the resistive load is, whenever possible, be as shown in Table 4 together with their decimal multiples or sub-multiples		N/A
6.5	Time periods		P
	The periods on-discharge and off-discharge are as specified in IEC 60086-2		P
	When formulating new tests, whenever possible, one of the following daily periods is adopted from Table 5		N/A
	Other cases are specified in IEC 60086-2, if necessary		N/A
6.6	Test condition tolerances		P
	Unless otherwise specified, the tolerances given in Table 6 are apply		P
6.7	Activation of 'P'-system batteries		N/A
	A period of at least 10 min is elapse between activation and the commencement of electrical measurement		N/A
6.8	Measuring equipment		P
6.8.1	Voltage measurement		P
6.8.2	Mechanical measurement		P
7	SAMPLING AND QUALITY ASSURANCE		N/A

IEC 60086-1			
Clause	Requirement + Test	Result - Remark	Verdict

	The use of production and incoming inspection sampling plans or product quality indices are agreed between the manufacturer and the purchaser		N/A
8	BATTERY PACKAGING		P
	A code of practice for battery packaging, shipment, storage, use and disposal can be found in Annex G		N/A
A	ANNEX A (NORMATIVE) CRITERIA FOR THE STANDARDIZATION OF BATTERIES		N/A
	Batteries and electrochemical systems are meet the following requirements to justify their initial inclusion or ongoing retention in the IEC 60086 series		N/A
	a) The battery or batteries of this electrochemical system are in mass production		N/A
	b) The battery or batteries of this electrochemical system are available in several market places of the world		N/A
	c) Patent items are conform to the requirements contained in 2.14 of the ISO/IEC Directives, Part 1		N/A
	d) The battery is produced in at least two different countries or, alternatively, if produced in only one country, the battery is purchased by other international and independent battery manufacturers and sold under their company label		N/A
B	ANNEX B (INFORMATIVE) RECOMMENDATIONS FOR EQUIPMENT DESIGN		N/A
B.1	Technical liaison		N/A
	It is recommended that companies producing battery-powered equipment maintain close liaison with the battery industry. The capabilities of existing batteries are taken into account at design inception. Whenever possible, the battery type selected are one included in IEC 60086-2		N/A
	The equipment is permanently marked with the IEC designation, grade and size of battery which give optimum performance		N/A
B.2	Battery compartment		N/A
B.2.1	General		N/A
	The dimensions and design of compartments and contacts are such that batteries complying with this standard are accepted		N/A
	The design of the negative contact are make allowance for any recess of the battery terminal		N/A

IEC 60086-1			
Clause	Requirement + Test	Result - Remark	Verdict

	Clearly indicate the type of battery to use, the correct polarity alignment and directions for insertion		N/A
	Use the shape and/or the dimensions of the positive (+) and negative (–) battery terminals in compartment designs to prevent the reverse connection of batteries		N/A
	Positive (+) and negative (–) battery contacts are visibly different in form to avoid confusion when inserting batteries		N/A
	Battery compartments are electrically insulated from the electric circuit and positioned so as to minimize possible damage and/or risk of injury		N/A
	Battery compartments with parallel connections are not recommended since a wrongly placed battery result in charging conditions		N/A
	Equipment designed to be powered by air-depolarized batteries of either the "A" or "P" system are provide for adequate air access		N/A
	When the battery compartment cannot be completely isolated from the equipment, it are positioned so as to minimize possible damage		N/A
	The battery compartment are clearly and permanently marked to show the correct orientation of the batteries		N/A
	Battery compartments are designed so that a reversed battery will result in no electrical circuit		N/A
	The associated circuitry do not make physical contact with any part of the battery except at the surfaces intended for this purpose		N/A
	Designers are strongly advised to refer to IEC 60086-4 and IEC 60086-5 for comprehensive safety considerations		N/A
B.2.2	Limiting access by children		N/A
	Apparatus are designed to prevent children from removing the battery		N/A
B.3	Voltage cut-off		N/A
	The equipment voltage cut-off is not below the battery manufacturers' recommendation		N/A
C	ANNEX C (NORMATIVE) DESIGNATION SYSTEM (NOMENCLATURE)		P
C.1	General		P
C.2	Designation system in use up to October 1990		P
C.2.1	General		P

IEC 60086-1			
Clause	Requirement + Test	Result - Remark	Verdict

C.2.2	Cells		P
C.2.3	Electrochemical system		P
C.2.4	Batteries		P
C.2.5	Modifiers		P
C.2.6	Examples		N/A
C.3	Designation system in use since October 1990		N/A
C.3.1	General		N/A
C.3.2	Round batteries		N/A
C.3.3	Non-round batteries		N/A
C.3.4	Ambiguity		N/A
D	ANNEX D (INFORMATIVE) STANDARD DISCHARGE VOLTAGE US – DEFINITION AND METHOD OF DETERMINATION		N/A
D.1	Definition		N/A
D.2	Determination		N/A
D.2.1	General considerations: the C/R-plot		N/A
D.2.2	Determination of the standard discharge resistor Rs		N/A
D.2.3	Determination of the standard discharge capacity Cs and standard discharge time ts		N/A
D.3	Experimental conditions to be observed and test results		N/A
E	ANNEX E (INFORMATIVE) PREPARATION OF STANDARD METHODS OF MEASURING PERFORMANCE (SMMP) OF CONSUMER GOODS		N/A
E.1	General		N/A
E.2	Performance characteristics		N/A
E.3	Criteria for the development of test methods		N/A
F	ANNEX F (INFORMATIVE) GUIDANCE FOR PROPOSING VALUE OF MINIMUM AVERAGE DURATION		N/A
F.1	General		N/A
F.2	Sampling		N/A
F.3	Calculation method		N/A
G	ANNEX G (NORMATIVE) CODE OF PRACTICE FOR PACKAGING, SHIPMENT, STORAGE, USE AND DISPOSAL OF PRIMARY BATTERIES		N/A
G.1	General		N/A

IEC 60086-1			
Clause	Requirement + Test	Result - Remark	Verdict

G.2	Packaging		N/A
G.3	Transport and handling		N/A
G.4	Storage and stock rotation		N/A
G.5	Displays at sales points		N/A
G.6	Selection, use and disposal		N/A
G.6.1	Purchase		N/A
G.6.2	Installation		N/A
G.6.3	Use		N/A
G.6.4	Replacement		N/A
G.6.5	Disposal		N/A
H	ANNEX H (INFORMATIVE) COMPLIANCE CHECKLIST		N/A

IEC 60086-2			
Clause	Requirement + Test	Result - Remark	Verdict

7	CONSTITUTION OF THE BATTERY SPECIFICATION TABLES		P
	Batteries are categorized into the following groups:		P
	a) Category 1: R1, R03, R6P, R6S, R14P, R14S, R20P, R20S LR8D425, LR1, LR03, LR6, LR14, LR20, FR10G445, FR14505	LR6	P
	b) Category 2: CR14250, CR15H270, CR17345, CR17450, BR17335		N/A
	c) Category 3: LR9, CR11108		N/A
	d) Category 4: PR70, PR41, PR48, PR44, PR1154 LR41, LR55, LR54, LR43, LR44 SR62, SR63, SR65, SR64, SR60, SR67, SR66, SR58, SR68, SR59, SR69, SR41, SR57, SR55, SR48, SR54, SR42, SR43, SR44 CR1025, CR1216, CR1220, CR1225, CR1616, CR1632, CR2012, CR1620, CR2016, CR2025, CR2320, CR2032, CR2330, CR2412, CR2430, CR2477, CR2354, CR3032, CR2450 BR1225, BR2016, BR2320, BR2325, BR3032		N/A
	e) Category 5: Other round batteries – Miscellaneous 2CR13252 4LR44 4SR44 8LR932 AR40 5AR40 6AR40 5PR175/172,6 PR 225/155		N/A

IEC 60086-2			
Clause	Requirement + Test	Result - Remark	Verdict

	f) Category 6: Non-round batteries – Miscellaneous: 3R12P, 3R12S, 3LR12 4LR61 CR-P2 2CR5 AS4, AS6P, AS6S, AS8, AS10, AS12, PS8S, PS8P, PS10 4R25X, 4LR25X 4R25Y 4R25-2, 4LR25-2 6F22, 6LR61, 6LP3146 6AS4S, 6PS4S, 6PS4P 6AS6P, 6AS6S, 6PS6P, 6PS6S		N/A
--	---	--	-----

8	PHYSICAL AND ELECTRICAL SPECIFICATIONS		P
8.1	Category 1 batteries		P
8.1.1	General		P
8.1.2	Specifications: LR1, R1, LR8D425.....:		N/A
8.1.3	Specifications: LR03, FR10G445, R03.....:		N/A
8.1.4	Specifications: LR6, FR14505, R6P, R6S	LR6	P
8.1.5	Specifications: LR14, R14P, R14S		N/A
8.1.6	Specifications: LR20, R20P, R20S		N/A
8.2	Category 2 batteries		N/A
	Specifications: CR14250, CR15H270, CR17345, CR17450, BR17335..... :		N/A
8.3	Category 3 batteries		N/A
	Specifications: LR9, CR11108..... :		N/A
8.4	Category 4 batteries		N/A
8.4.1	General		N/A
8.4.2	Specifications: PR70, PR41, PR48, PR44, PR1154 :		N/A
8.4.3	Fit acceptance gauge for PR batteries		N/A
8.4.4	Specifications: LR41, LR55, LR54, LR43, LR44 :		N/A
8.4.5	Specifications: SR62, SR63, SR65, SR64, SR60, SR67, SR66, SR58, SR68, SR59, SR69, SR41, SR57, SR55, SR48, SR54, SR42, SR43, SR44		N/A
8.4.6	Specifications: CR1025, CR1216, CR1220, CR1225, CR1616, CR2012, CR1620, CR1632, CR2016, CR2025, CR2320, CR2032, CR2330, CR2430, CR2354, CR3032, CR2450, CR2477, BR1225, BR2016, BR2320, BR2325, BR3032..... :		N/A

IEC 60086-2			
Clause	Requirement + Test	Result - Remark	Verdict

8.5	Category 5 batteries		N/A
8.5.1	Specifications: 2CR13252, 4LR44, 4SR44..... :		N/A
8.5.2	Specifications: 8LR932 :		N/A
8.5.3	Specifications: AR40, 5AR40, 6AR40, 5PR175/172, 6PR225/155 :		N/A
8.6	Category 6 batteries		N/A
8.6.1	Specifications: 4LR61 :		N/A
8.6.2	Specifications: CR-P2 :		N/A
8.6.3	Specifications: 2CR5..... :		N/A
8.6.4	Specifications: 3R12P, 3R12S, 3LR12..... :		N/A
8.6.5	Specifications: AS4, AS6, AS8, AS10, AS12, PS8S, PS8P, PS10 :		N/A
8.6.6	Specifications: 4R25Y :		N/A
8.6.7	Specifications: 4R25X, 4LR25X..... :		N/A
8.6.8	Specifications: 4R25-2, 4LR25-2 :		N/A
8.6.9	Specifications: 6AS4S, 6PS4S, 6PS4P..... :		N/A
8.6.10	Specifications: 6F22, 6LR61, 6LP3146 :		N/A
8.6.11	Configurations: Stud for 6F22, 6LR61, 6LP3146 :		N/A
8.6.12	Specifications: 6AS6P, 6AS6S, 6PS6P, 6PS6S :		N/A

TABLE 1: Dimension and Open –circuit voltage (OCV)						P
Test program		Standard requirement	Unit	Sample size	Measured data	Results
Battery dimensions	Height	49,5~50,5	mm	48 pcs	50,01~50,12	Pass
	Diameter	13,7~14,5	mm	48 pcs	13,93~13,99	Pass
Open-circuit voltage	OCV	1,5~1,68	V	48 pcs	1,644~1,646	Pass
Supplementary information: None						

TABLE 2: Minimum average duration (MAD)						P
Test program	Standard requirement	Unit	Sample size	Measured data	Average	Result
High drain application (1500 mW 650 mW, Repeat 10 times per hour: 1 500 mW for 2 s, then 650 mW for 28 s, then 0 mW for 55 min. EV: 1,05 V)	≥40	pulses	8 pcs	56; 55; 54; 49; 56; 55; 54; 55	54	Pass
Portable lighting (LED) (3,9 Ω, 4 min on, 56 min off for 8h per day. EV: 0,9 V)	≥230	min	8 pcs	367,80; 331,90; 371,23; 355,83; 351,93; 371,17; 363,77; 367,30	360,116	Pass
Motor/toy (3,9 Ω, 1 h per day. EV: 0,8 V)	≥5	h	8 pcs	6,75; 6,77; 6,72; 6,78; 6,68; 6,75; 6,94; 6,71	6,763	Pass
Toy, non-motorized (250 mA, 1 h per day. EV: 0,9 V)	≥5	h	8 pcs	6,78; 6,82; 6,79; 6,81; 6,82; 6,82; 6,82; 6,83	6,811	Pass
CD, digital audio, wireless gaming and accessories (100 mA, 1 h per day. EC: 0,9 V)	≥15	h	8 pcs	20,42; 20,51; 20,43; 20,74; 20,62; 20,48; 20,51; 20,43	20,518	Pass
Radio /clock/remote control (50 mA, 1 h on, 7 h off for 24 h per day. EV:1,0 V)	≥30	h	8 pcs	40,87; 41,45; 40,88; 41,35; 41,56; 41,35; 41,38; 41,41	41,281	Pass

TABLE 3: Leakage and dimension				P
Test program	Standard requirement	Sample size	Result	
High drain application (Repeat 10 times per hour: 1 500 mW for 2 s, then 650 mW for 28 s, then 0 mW for 55 min. EV: 0,6 V)	no leakage no deformation	8 pcs	Pass	
Portable lighting (LED) (3,9 Ω, 4 min on, 56 min off for 8h per day. EV: 0,6 V)	no leakage no deformation	8 pcs	Pass	
Motor/toy (3,9 Ω, 1 h per day. EV: 0,6 V)	no leakage no deformation	8 pcs	Pass	
Toy, non-motorized (250 mA, 1 h per day. EV: 0,6 V)	no leakage no deformation	8 pcs	Pass	

CD, digital audio, wireless gaming and accessories (100 mA, 1 h per day. EC: 0,6 V)	no leakage no deformation	8 pcs	Pass
Radio /clock/remote control (50 mA, 1 h on, 7 h off for 24 h per day. EV: 0,6 V)	no leakage no deformation	8 pcs	Pass

Attachment 1: Photos



---End report---