

Test Report**Report No.: SHES240200271601****Date: 2024-04-03**

Applicant: **SUZHOU XINLVZHOU ELECTRONICS CO., LTD.**
SHANJI ROAD 158, XIANGCHENG DISTRICT, SUZHOU CITY, JIANGSU, CHINA

Manufacturer: **Same as applicant**

Factory: **Same as applicant**

Testing Laboratory: **SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.**
Address: **588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China**

Test object / Model: **BATTERY**
6LR61

Test specifications / Test standard: **IEC 60086-5: 2021 / EN IEC 60086-5: 2021**

Purpose of examination: **Test according to the test specification.**

Test result: **See below pages.**

Remark: **None**



Bruce Wu
Project Reviewer
Safety Laboratory



Vivian Ni
Project Engineer

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Report

Report No.: SHES240200271601

Date: 2024-04-03

1. Function / Description:

Primary battery, Alkaline.

2. Ratings:

Model: 6LR61
Trandmark: warriors
Rated Voltage: 9 V

3. Test:

Possible test case verdicts:


- test case does not apply to the test object: N/A (Not Applicable)
- test object does meet the requirement: P (Pass)
- test object does not meet the requirement: F (Fail)

The tests were done in the Electrical Safety Laboratory of SGS-CSTC in Shanghai.

Test item was received on 2024-02-01.

Tests were performed from 2024-02-01 to 2024-03-06.

Marking plate

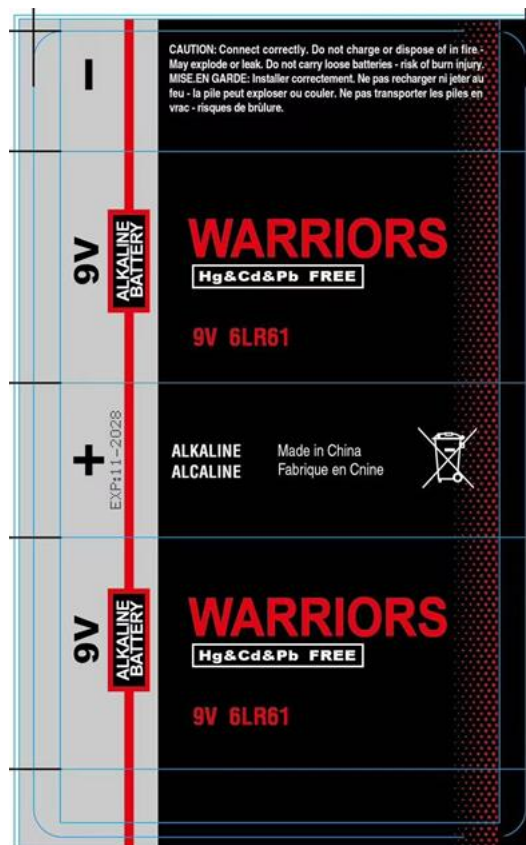

Test result:

4	Requirements for safety		P
4.1	Design		P
4.1.1	General		P
	Batteries shall be so designed that they do not present a safety hazard under conditions of normal (intended) use.		P
4.1.2	Venting		P
	All batteries shall incorporate a pressure relief feature or shall be so constructed that they will relieve excessive internal pressure at a value and rate which will preclude explosion		P
	The battery case material and/or its final assembly shall be so designed that, in the event of one or more cells venting, the battery case does not present a hazard in its own right		P
4.2	Quality plan		P
	The manufacturer shall prepare a quality plan defining the procedures for the inspection of materials, components, cells and batteries during the course of manufacture, to be applied to the total process of producing a specific type of battery	Provided declaration	P

5	Sampling		P
5.1	General		P
	Samples should be drawn from production lots in accordance with accepted statistical methods and shall meet the requirements specified for dimensions and open circuit voltage set forth in IEC 60086-2.		P
5.2	Sampling for type approval	See Table 5.2	P
	The number of samples drawn for type approval is given in below,		P
	Open circuit voltage (n = 70) Dimensions (n = 70)		P
	Intended use A Partial use (n = 5) B-1 Transportation-shock (n = 5) B-2 Transportation-vibration (n = 5) C Climatic (n = 5)		P

	Reasonably foreseeable A misuse D Incorrect installation (n = 20) E External short circuit (n = 5) F Overdischarge (n = 20) G Free fall (n = 5)		P
5.3	Validity of testing		P
	Cells or batteries with aqueous electrolyte shall be subjected to the tests, as required in this document.		P
	Testing remains valid until a design change or requirement revision has been made. Retesting is required when:		N/A
	a) a battery specification changes by more than 0,1 g or 20 % mass, whichever is greater, for the cathode, anode or electrolyte;		N/A
	b) a battery specification change would lead to a failure of any of the tests;		N/A
	c) there is an addition of new tests or requirements;		N/A
	d) there is a requirement change that would lead to a failure of any of the tests.		N/A

6	Testing and requirements		P
6.1	General		P
6.1.1	Applicable safety tests		P
	Applicable safety tests are shown in Table 1.		P
	The tests described in Tables 2 and 6 are intended to simulate conditions which the battery is likely to encounter during intended use and reasonably foreseeable misuse.	6LR61, multicell	P
6.1.2	Cautionary notice		P
6.1.3	Ambient temperature		P
	Unless otherwise specified, these tests shall be carried out at (20 ± 5) °C		P
6.2	Evaluation of test criteria		P
6.2.1	Explosion		P
	An explosion is considered to have occurred when there is an instantaneous release wherein solid matter from any part of the battery is propelled to a distance greater than 25 cm away from the battery.		P
6.2.2	Fire		P
	A fire is considered to have occurred if flames are emitted from a test cell or battery.		P
6.2.3	Leakage		P

	Leakage is considered to have occurred if there is an unplanned escape of electrolyte from a cell or battery.		P
6.2.4	Venting		P
	Venting is considered to have occurred if there is a release of excessive internal pressure from a cell or battery in a manner intended by design to preclude explosion.		P
6.3	Intended use		P
6.3.1	Intended use tests and requirements		P
6.3.2	Intended use test procedures		P
6.3.2.1	Test A – Storage after partial use		P
	An undischarged battery is discharged under an application or service output test condition, with the load defined in IEC 60086-2 resulting in the longest test duration until the service life falls by 50 % of the highest minimum average duration (MAD) value, followed by storage at (45 ± 2) °C for 30 days	Discharge load: 620 Ω Discharge time: 12 h	P
	Results: no leakage, no fire and no explosion :	See Table 6.3.2.1	P
6.3.2.2	Test B-1 – Transportation-shock		P
	The shock test shall be carried out under the conditions defined in Table 3 and the sequence in Table 4		P
	Results: no leakage, no fire and no explosion :	See Table 6.3.2.2	P
6.3.2.3	Test B-2 – Transportation-vibration		P
	The vibration test shall be carried out under the following test conditions and the sequence in Table 5		P
	Results: no leakage, no fire and no explosion :	See Table 6.3.2.3	P
6.3.2.4	Test C – Climatic-temperature cycling		P
	Temperature cycling procedure (see 1) to 7) and/or Figure 2)		P
	Result: no fire and no explosion :	See Table 6.3.2.4	P
6.4	Reasonably foreseeable misuse		P
6.4.1	Reasonably foreseeable misuse tests and requirements		P
6.4.2	Reasonably foreseeable misuse test procedures		P
6.4.2.1	Test D – Incorrect installation (four batteries in series)		N/A
	The circuit were complete for - 24 hours elapsed, or		N/A
	- until the battery case temperature has returned to ambient		N/A

Test Report

Report No.: SHES240200271601

Date: 2024-04-03

	Results: no fire and no explosion		N/A
6.4.2.2	Test E – External short circuit		P
	The circuit were complete for		P
	- 24 hours elapsed, or		
	- until the battery case temperature has returned to ambient		P
	Results: no fire and no explosion	See Table 6.4.2.2	P
6.4.2.3	Test F – Overdischarge		N/A
	Results: no fire and no explosion		N/A
6.4.2.4	Test G – Free fall test		P
	Results: no fire and no explosion	See Table 6.4.2.4	P

7	Information for safety	Relevant document was not provided.	Not checked
----------	-------------------------------	-------------------------------------	--------------------

8	Instructions for use	Relevant document was not provided.	Not checked
----------	-----------------------------	-------------------------------------	--------------------

9	Marking		P
9.1	General batteries		P
	With the exception of small batteries (see 9.2), each battery shall be marked with the following information		P
	a) designation, IEC or common.....	6LR61, 9V	P
	b) expiration of a recommended usage period or year and month or week of manufacture		P
	c) polarity of the positive (+) terminal		P
	d) nominal voltage.....		P
	e) name or trade mark of the manufacturer or supplier		P
	f) cautionary advice.....		P
9.2	Swallowable button cells		N/A
N	a) designation, IEC or common.....		N/A
	b) expiration of a recommended usage period or year and month or week of manufacture		N/A
	c) polarity of the positive (+) terminal		N/A
	d) nominal voltage.....		N/A
	e) name or trade mark of the manufacturer or supplier		N/A
	f) cautionary advice.....		N/A

	g) Caution for ingestion of swallowable batteries, see also 7.1 c) and Annex D		N/A
	h) Child resistant packaging		N/A
9.3	Safety pictograms		N/A
	Safety pictograms that could be considered for use as an alternative to written cautionary advice are provided in Annex C.		N/A

Annex A	Additional information on display and storage	Relevant document was not provided.	Not checked
----------------	--	-------------------------------------	--------------------

Annex B	Battery compartment design guidelines	Relevant document was not provided.	Not checked
----------------	--	-------------------------------------	--------------------

Annex C	Safety pictograms	Relevant document was not provided.	Not checked
----------------	--------------------------	-------------------------------------	--------------------

Annex D	Use of the KEEP OUT OF REACH OF CHILDREN safety sign	Relevant document was not provided.	Not checked
----------------	---	-------------------------------------	--------------------

Annex E	Child resistant packaging	Relevant document was not provided.	Not checked
----------------	----------------------------------	-------------------------------------	--------------------

Test Report

Report No.: SHES240200271601

Date: 2024-04-03

6.3.2.1	TABLE: Test A – Storage after partial use					P
Model, Sample number	OCV at start of test (Vdc)	Lowest resistive load (Ω)	MAD (h)	Storage temperature (45 $\pm$ 5 °C)	Results	
#01	8,68	620	12	45	P	
#02	8,68	620	12	45	P	
#03	8,68	620	12	45	P	
#04	8,68	620	12	45	P	
#05	8,68	620	12	45	P	
Supplementary information:						
- No fire - No explosion - No leakage						

6.3.2.2	TABLE: Test B-1 – Transportation-shock			P
Model, Sample number	Ambient (20 $\pm$ 5 °C)	OCV at start of test (Vdc)	Results	
#06	19,7	9,70	P	
#07	19,7	9,71	P	
#08	19,7	9,71	P	
#09	19,7	9,71	P	
#10	19,7	9,71	P	
Supplementary information:				
- No fire - No explosion - No leakage				

Test Report

Report No.: SHES240200271601

Date: 2024-04-03

6.3.2.3	TABLE: Test B-2 – Transportation-Vibration			P
Model, Sample number	Ambient (20 ± 5 °C)	OCV at start of test (Vdc)	Results	
#11	19,7	9,70	P	
#12	19,7	9,71	P	
#13	19,7	9,70	P	
#14	19,7	9,71	P	
#15	19,7	9,71	P	
Supplementary information:				
- No fire				
- No explosion				
- No leakage				

6.3.2.4	TABLE: Test C – Climatic-temperature cycling		P
Model, Sample number		OCV at start of test (Vdc)	Results
#16		9,71	P
#17		9,71	P
#18		9,70	P
#19		9,71	P
#20		9,71	P
Supplementary information:			
- No fire			
- No explosion			

6.4.2.1	TABLE: Test D – Incorrect installation					N/A
Model, Sample number	Ambient (20 ± 5 °C)	OCV of reversed battery (Vdc)	Resistance of circuitry (Ω)	Maximum case temperature (°C)	Results	
--	--	--	--	--	--	
Supplementary information:						
None						

Test Report

Report No.: SHES240200271601

Date: 2024-04-03

6.4.2.2	TABLE: Test E – External short circuit					P
Model, Sample number	Ambient (20 ± 5 °C)	OCV of reversed cell (Vdc)	Resistance of circuitry (Ω)	Maximum case temperature (°C)	Results	
#21	19,9	9,70	0,079	90,5	P	
#22	19,9	9,70	0,079	91,7	P	
#23	19,9	9,70	0,084	78,8	P	
#24	19,9	9,69	0,079	78,3	P	
#25	19,9	9,70	0,079	80,2	P	
Supplementary information:						
- No fire						
- No explosion						

6.4.2.3	TABLE: Test F – Overdischarge					N/A
Model, Sample number	Ambient (20 ± 5 °C)	OCV at start of test (Vdc)	Highest MAD (h)	R1 (Ω)	Results	
--	--	--	--	--	--	
Supplementary information:						
None						

6.4.2.4	TABLE: Test G – Free fall test				P
Model, Sample number	Ambient (20 ± 5 °C)	OCV at start of test (Vdc)	Results		
#26	20,1	9,71	P		
#27	20,1	9,71	P		
#28	20,1	9,70	P		
#29	20,1	9,71	P		
#30	20,1	9,71	P		
Supplementary information:					
- No fire					
- No explosion					

Photo documentation



--- End of Report ---